


Fused Silica Capillary Tubing

FSS Standard Polyimide Coating

Standard polyimide coating
Synthetic fused silica
100% proof tested at 100kpsi
High Temperature Operation up to 400 °C

FSU UV Transparent Coating

UV transparent Coating
Synthetic fused silica
Operation up to 160 °C

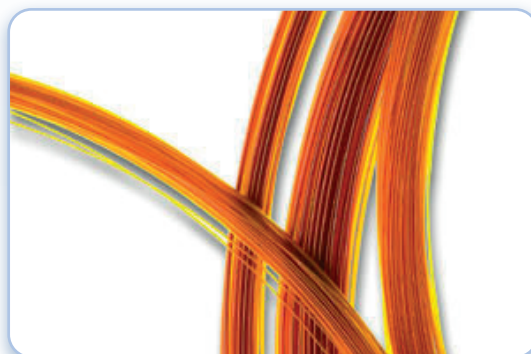

We provide a great variety of flexible fused silica capillary products with inner diameters from 2 - 700 μm and with numerous coatings available. We can supply a wide range of tubing from thin walled polyimide coated flexible fused silica to thick walled silica quartz tubes without coating. We can provide custom sizes, custom tolerances, and a wide range of durable and protective coatings with lowest tolerances to meet our customer's needs.

Applications

Fused silica is used for a broad range of applications. Some examples are

- Capillary Electrophoresis with tubing and windowed capillaries.
- Gas Chromatography with tubing and coils and for GC columns in different varieties.
- Genomics with tubing, arrays, and assemblies for DNA sequencing and fragment analysis.
- Proteomics with tubing for capillary LC columns, fluid connections, and MS interfacing.
- Microfluidics including Lab-on-a-chip with tubing for fluid connections for nano/micro devices.
- Mass Flow Control with precision cut pieces for tightly controlled delivery of gases/fluids.
- Precision Flow Cells with custom tubing for Cytometry, Chromatography and CE.

Fused Silica Capillary Tubing

FSS Standard Polyimide Coating, Length per Meter available on Request, Price per Meter

Part #	ID	OD	Part #	ID	OD
Z-FSS-002150	ID 002 µm	OD 150 µm	Z-FSS-100270	ID 100 µm	OD 270 µm
Z-FSS-005150	ID 005 µm	OD 150 µm	Z-FSS-100280	ID 100 µm	OD 280 µm
Z-FSS-005365	ID 005 µm	OD 365 µm	Z-FSS-100300	ID 100 µm	OD 300 µm
Z-FSS-010150	ID 010 µm	OD 150 µm	Z-FSS-100315	ID 100 µm	OD 315 µm
Z-FSS-015150	ID 015 µm	OD 150 µm	Z-FSS-100365	ID 100 µm	OD 360 µm
Z-FSS-015365	ID 015 µm	OD 360 µm	Z-FSS-100375	ID 100 µm	OD 375 µm
Z-FSS-020090	ID 020 µm	OD 090 µm	Z-FSS-100500	ID 100 µm	OD 500 µm
Z-FSS-020130	ID 020 µm	OD 130 µm	Z-FSS-115360	ID 115 µm	OD 360 µm
Z-FSS-020150	ID 020 µm	OD 150 µm	Z-FSS-125360	ID 125 µm	OD 360 µm
Z-FSS-020280	ID 020 µm	OD 280 µm	Z-FSS-140240	ID 140 µm	OD 240 µm
Z-FSS-020365	ID 020 µm	OD 360 µm	Z-FSS-140300	ID 140 µm	OD 300 µm
Z-FSS-025150	ID 025 µm	OD 150 µm	Z-FSS-150240	ID 150 µm	OD 240 µm
Z-FSS-025280	ID 025 µm	OD 280 µm	Z-FSS-150260	ID 150 µm	OD 260 µm
Z-FSS-025365	ID 025 µm	OD 360 µm	Z-FSS-150280	ID 150 µm	OD 280 µm
Z-FSS-025370	ID 025 µm	OD 370 µm	Z-FSS-150365	ID 150 µm	OD 360 µm
Z-FSS-030150	ID 030 µm	OD 150 µm	Z-FSS-180270	ID 180 µm	OD 270 µm
Z-FSS-040130	ID 040 µm	OD 130 µm	Z-FSS-180300	ID 180 µm	OD 300 µm
Z-FSS-040150	ID 040 µm	OD 150 µm	Z-FSS-180365	ID 180 µm	OD 360 µm
Z-FSS-050150	ID 050 µm	OD 150 µm	Z-FSS-200280	ID 200 µm	OD 280 µm
Z-FSS-050190	ID 050 µm	OD 190 µm	Z-FSS-200300	ID 200 µm	OD 300 µm
Z-FSS-050200	ID 050 µm	OD 200 µm	Z-FSS-200350	ID 200 µm	OD 350 µm
Z-FSS-050280	ID 050 µm	OD 280 µm	Z-FSS-200365	ID 200 µm	OD 360 µm
Z-FSS-050365	ID 050 µm	OD 360 µm	Z-FSS-220350	ID 220 µm	OD 350 µm
Z-FSS-060365	ID 060 µm	OD 360 µm	Z-FSS-220360	ID 220 µm	OD 360 µm
Z-FSS-075150	ID 075 µm	OD 150 µm	Z-FSS-250350	ID 250 µm	OD 350 µm
Z-FSS-075200	ID 075 µm	OD 200 µm	Z-FSS-250365	ID 250 µm	OD 360 µm
Z-FSS-075220	ID 075 µm	OD 220 µm	Z-FSS-250380	ID 250 µm	OD 380 µm
Z-FSS-075240	ID 075 µm	OD 240 µm	Z-FSS-280380	ID 280 µm	OD 380 µm
Z-FSS-075280	ID 075 µm	OD 280 µm	Z-FSS-320435	ID 320 µm	OD 435 µm
Z-FSS-075365	ID 075 µm	OD 360 µm	Z-FSS-430550	ID 430 µm	OD 550 µm
Z-FSS-100170	ID 100 µm	OD 170 µm	Z-FSS-450660	ID 450 µm	OD 660 µm
Z-FSS-100200	ID 100 µm	OD 200 µm	Z-FSS-530660	ID 530 µm	OD 660 µm
Z-FSS-100250	ID 100 µm	OD 250 µm	Z-FSS-700850	ID 700 µm	OD 850 µm

Part #	Description
FSU UV Transparent Coating	
Z-FSU-050365	Capillary, Fused Silica, ID 050 µm; OD 363 µm; Coating 15 µm; 25 m
Z-FSU-075365	Capillary, Fused Silica, ID 075 µm; OD 363 µm; Coating 15 µm; 25 m
Z-FSU-100365	Capillary, Fused Silica, ID 100 µm; OD 363 µm; Coating 15 µm; 25 m
Fused Silica Capillaries from Upchurch Scientific/IDEX	
FS-110	Capillary, Fused Silica, ID 100 µm; OD 360 µm; 2 m
FS-115	Capillary, Fused Silica, ID 150 µm; OD 360 µm; 2 m
FS-120	Capillary, Fused Silica, ID 020 µm; OD 360 µm; 2 m
FS-150	Capillary, Fused Silica, ID 050 µm; OD 360 µm; 2 m
FS-175	Capillary, Fused Silica, ID 075 µm; OD 360 µm; 2 m
Fused Silica Capillary for Dionex LC-Packings Ultimate Capillary/Nano HPLC	
Z-DI-160475	Capillary, Fused Silica, ID 020 µm; OD 280 µm; 5 m, Interface Capillary to MS
Z-DI-160476	Capillary, Fused Silica, ID 025 µm; OD 280 µm; 5 m, Interface Capillary to MS
Z-DI-160477	Capillary, Fused Silica, ID 050 µm; OD 280 µm; 5 m, Interface Capillary to MS
Z-DI-160478	Capillary, Fused Silica, ID 075 µm; OD 280 µm; 5 m, Interface Capillary to MS
Z-DI-160479	Capillary, Fused Silica, ID 100 µm; OD 280 µm; 5 m, Interface Capillary to MS
Z-DI-160480	Capillary, Fused Silica, ID 150 µm; OD 280 µm; 5 m, Interface Capillary to MS
Z-DI-160481	Capillary, Fused Silica, ID 200 µm; OD 280 µm; 5 m, Interface Capillary to MS

Other lengths available on request!

Key Features

- Internal diameters from 2 µm up to approx. 700 µm.
- Outer diameters down from 90 µm up to approx. 900 µm.
- Excellent chemical durability and inertness.
- Silica and quartz that are stronger than steel.
- Tight but still economical affordable tolerances.
- Materials that are easy to cleave or cut.
- Proven combination of silica and polyimide.
- FS capillaries with unique strength/flexibility.
- Low fluorescence background for stable reproducible use in on-column detection methods because of superior UV/Vis transmission when protective coating is removed.
- High purity silica allows for precision laser machining of integrated value added features.
- Avoid coating contact on the outside with organic solvents, acids or alkaline solutions. This might break/dissolve the coating.

FSS Standard Polyimide Coating

- Standard polyimide coating
- Synthetic fused silica
- 100 % proof tested at 100 kpsi
- High Temperature Operation up to 400 °C

FSU UV Transparent Coating

- UV transparent Coating
- Synthetic fused silica
- Operation up to 160 °C

Contact

- Postnova Analytics GmbH
86899 Landsberg, GERMANY
T: +49 8191 985 688 0
- Postnova Analytics UK Ltd.
Malvern, Worcestershire, WR14 3SZ, UK
T: +44 1684 585167
- Postnova Analytics Inc.
Salt Lake City, UT 84102, USA
T: +1 801 521 2004

info@postnova.com
www.postnova.com