

# Liquid Handling Solutions

Proven products. Customized options. Reliable results.



**HAMILTON** 

# A partnership you can count on

When your instrumentation requires fluid handling equipment, you need more than parts—you need a partner. And that partner is Hamilton Company.

Hamilton Company has been delivering liquid handling solutions to customers for 60 years. We are an established partner to many top instrument manufacturers in the clinical diagnostic, chromatography, life science research and other industries. From pumps to valves to pipetting modules and more, Hamilton Company offers a full line of off-the-shelf and customized products for every element in the fluid path. Our liquid handling components integrate seamlessly into your system and ensure the reliable operation of your high-performance instrumentation.

**Your success is Hamilton's success.**





## Unlimited Customization Options

See more on [page 12](#)



## Overview of Precision Syringe Drives

See more on [page 11](#)



## Top Performing Instrument Syringes

See more on [page 27](#)

# Table of Contents

<b>The Benefits of Choosing Hamilton</b> .....	3
Design and Prototyping .....	5
Quality Manufacturing .....	6
Hamilton Facilities.....	7
<b>Understanding Liquid-Filled Sub-Systems</b> .....	9
<b>Precision Syringe Drive Pumps</b> .....	11
Syringe Pump Overview .....	11
PSD/4 Half-Height Syringe Pump .....	13
PSD/3 Half-Height Syringe Pump .....	15
PSD/2 Full-Height Syringe Pump.....	17
PSD/8 Full-Height Syringe Pump.....	19
<b>Modular Valve Positioners</b> .....	21
<b>Microlab 600 Custom Program Syringe Pump</b> .....	23
<b>Instrument Valves</b> .....	25
<b>Manual Valves</b> .....	26
<b>Instrument Syringes</b> .....	27
Instrument Syringe Overview.....	27
Syringe Longevity and Development .....	29
<b>Technical References</b> .....	31
<b>Syringe Specifications, Intended Use and Connections</b> .....	31
Valve Types by Use .....	33
PSD Syringe Pump Fluid Paths .....	34
Modular Valve Positioner and Manual Valve Fluid Paths.....	35
Communications Protocol .....	37
<b>About Hamilton Company</b> .....	38

For more information on the full portfolio of Hamilton liquid handling solutions or to inquire about a product, please visit [www.hamiltoncompany.com](http://www.hamiltoncompany.com) or refer to the back of this catalog for additional contact details.

# The Benefits of Choosing Hamilton

Selecting the right fluid handling components for your device is critical. Parts that are unreliable or do not perform as promised can alter instrument performance, delay market release, greatly increase field service costs and jeopardize the relationship with your customer.

You need a partner that offers product expertise, reduces the time and cost of development and production, simplifies your manufacturing process and helps you gain market share.



**Expertise. Commitment. Quality.**

Hamilton Company excels at collaborating with you to find the perfect solution that meets every expectation, and that's why more and more customers are choosing us. Hamilton has been developing answers to countless liquid handling questions for nearly 60 years, and it's hard to imagine a challenge Hamilton hasn't already solved. We've developed and manufactured specialty and turnkey syringes, valves, diluters/dispensers and pumps for all types of applications for companies of all sizes, all around the world. Our customers come to us for worry-free, cost-effective components, and Hamilton is proud to deliver every time.

Hamilton Company's engineering teams in Reno, Nevada and Bonaduz, Switzerland are committed to constantly reviewing and improving our liquid handling solutions. The feedback we receive from customers affects our

engineering cycle and often results in improvements to existing items or the introduction of new products that fulfill unmet needs.

In addition to our comprehensive assortment of standard options, Hamilton also offers unlimited possibilities through its product modification process. Because Hamilton manufactures each element of the fluid path, we can customize any item to meet your unique requirements. And to ensure timeliness, whether your system utilizes standard, existing Hamilton products or custom components, turnaround time is minimized so you can beat your competitors to the marketplace.

Hamilton blends liquid handling experience, technological innovation and manufacturing quality to produce exactly what you need.



## Design and Prototyping

In Hamilton's nearly 60 years' experience in liquid handling, we've learned each project is different and requires a fresh approach—which is why no two tasks are ever treated the same. Hamilton's dedicated team of designers openly work with you through an in-depth investigative phase that reveals all the requirements and dependencies of your instrument so the perfect match can be found or developed for you. Your design lead will frequently keep you up to date every step of the way so you can be confident of our mutual progress.

Hamilton's design engineers are supported by a fully staffed group of experienced machinists who are skilled in the latest modeling tools and familiar with a wide range of materials, including plastics and chemically resistant metals such as high grade stainless steel. This allows your designs to become prototypes faster. Minor schematic changes and exploratory components are handled quickly and easily. Every step in the development process is closely documented so when the correct design is achieved, the transition to full-production manufacturing happens seamlessly.



# Quality Manufacturing

Hamilton's manufacturing facilities in Reno, Nevada and Bonaduz, Switzerland combine modern automated techniques with the fine-tuning of manual procedures. Every step of the process is analyzed and optimized for maximum throughput and efficiency. Assembly procedures are documented with controlled revisions to ensure each item is built to your exact specifications.

Hamilton's commitment to total quality empowers the factory team to draw attention to errors and make necessary improvements so each component is made right the first time. Hamilton is an ISO 9001 certified manufacturer accustomed to working with heavily regulated industries. Hamilton is a strictly controlled environment which is why it is capable of manufacturing RoHS-compliant products and providing components for in vitro diagnostic (IVD) instruments. Many of our products are subject to FDA review, and our quality system passes even the toughest audits.



# Hamilton Facilities

Hamilton has headquarters in Reno, Nevada and Bonaduz, Switzerland. The teams in each location work together to provide design, manufacturing and technical support to customers worldwide.

Each facility features a fully-equipped manufacturing operation with more than 100,000 square feet of space, meaning we have room to accommodate projects of any size. Hamilton's talented teams in each office have the skills and experience to meet the demands of your project.



*Reno, Nevada, United States*



*Bonaduz, Switzerland*





# Understanding Liquid-Filled Sub-Systems

The Hamilton syringe pumps are typically used in liquid-filled sub-system applications to precisely transfer samples and reagents, do bulk dispensing and enable processes where accurate dispenses are a must. Two important qualities of syringe pumps are that they positively displace liquid and are generally easy to service.

Positive displacement enables users to dispense liquids with high accuracy and precision. Due to the incompressibility of liquid, syringe pumps are normally not impacted by liquid and environmental factors like surface tension, viscosity, humidity, hydrostatic pressure and barometric pressure.

Syringe pumps can also be used in conjunction with a disposable tip to perform air displacement pipetting. The liquid in the lines becomes a system fluid that draws liquid into the tip and then dispenses. There are three benefits to this arrangement. First, if there is a concern about cross-contamination, the disposable tip can be thrown away. Second, if bulk reagent is needed for multiple dispenses of the application, the syringe pump can provide it. Third, the system fluid can be used as rinse liquid.



**Other benefits of liquid-filled positive displacement systems include:**

- ▶ Large dispense range from 50 µL to nanoliters
- ▶ Inert fluid path manages harsh chemicals like concentrated acids, bases and volatile organic solvents
- ▶ Faster bulk dispensing compared to air displacement pipetting because sample does not need to be picked up from one location and transferred to another
- ▶ The valves, syringes and tubing can be exchanged in minutes, simplifying periodic maintenance service
- ▶ Continuous multiple dispenses of the system liquid
- ▶ Multiple syringe pumps can be daisy chained (i.e., aspiration of one syringe while the other dispenses) to increase throughput
- ▶ Ability to use syringe pump valves to sample-inject into higher pressure carrier fluid
- ▶ Can be used to manage consistent flow rates in microfluidic applications



# Precision Syringe Drive Pumps

Hamilton Precision Syringe Drive (PSD) pumps excel in longevity, precision and accuracy. Hamilton offers four options in two sizes. The PSD/4 and PSD/3 are space-saving, half-height models with a 30 mm stroke, and the PSD/2 and PSD/8 are full-height pumps with a 60 mm stroke and extra power.

## Syringe Pump Overview

All Hamilton PSD syringe pump models feature top-quality valves and syringes with chemically inert flow paths and isolation of circuit boards that protect against fluid and fume contact and ensure reliability of the operation.

### Superior form and function saves you money

Hamilton designs and builds each element of the fluid sub-system including the syringe, valve and pump. This integrated manufacturing process guarantees perfect compatibility between the components and results in superior performance of the whole unit, even in high throughput applications. The pumps' exceptional reliability results in reduced warranty repair costs and increased potential maintenance contract profit for you.

PSD pumps maximize syringe life because the syringes are made to precisely match the alignment and structure of the pump. And since Hamilton syringes are proven to last longer with no loss of performance, they can be replaced less often which increases profit in offered instrument maintenance contracts.



Hamilton offers tubing and stainless steel needles to complete your fluid sub-system. Contact your Account Executive for more information on the components right for your application.



**Complete customization**

The PSD pumps in the following sections represent Hamilton's base offering. Every aspect of each unit can be customized, including the size, shape, power, casing, fluid path, firmware, mount and more. Whatever your need, Hamilton can meet it.



# PSD/4 Half-Height Syringe Pump

## The lower cost option with lots of features

The PSD/4 is the most precise of all Hamilton syringe pumps. It is a popular choice for customers looking for a more economical alternative to the PSD/3 who do not require the PSD/3 syringe pump's distinctive features.

The PSD/4 performs all standard liquid handling functions, including dispensing, serial dispensing and diluting. It is the only half-height pump where the valve bolts directly to the face. This rigid attachment ensures long-term alignment of the valve and syringe and increases accuracy.

### Advanced firmware

The PSD/4 is available with two exclusive Hamilton advancements—smooth flow and true speed firmware. Smooth flow firmware ensures a steady stream of liquid with no surges and little to no pulsing. This firmware creates a very consistent flow rate particularly beneficial to those conducting flow cytometry. The pump's true speed firmware guarantees it functions at the speed you set it to with no variation. This benefit is especially critical for applications where a precise flow rate is required.



**Other features and benefits of the PSD/4:**

- ▶ 30 mm stroke length
- ▶ 22 lbf. of lift force; significant for its size
- ▶ Most mounting options of all units—front, back, top, bottom and side
- ▶ True speed firmware good for microfluidics
- ▶ Easy serviceability; high-quality replacement option for Cavro® units
- ▶ Small face print suits limited spaces
- ▶ Stepper motor with 24,000 steps per 30 mm stroke
- ▶ Operates alone or in a daisy chain
- ▶ Demo cables and software CD available
- ▶ Proven reliability with 10 years of market exposure
- ▶ RoHS-compliant

Visit [www.hamiltoncompany.com/OEM](http://www.hamiltoncompany.com/OEM) for more information on Hamilton liquid handling solution products.



**PSD/4 Specifications**

Highest Resolution (steps/stroke)	Fastest/Slowest Speed per Stroke (s)	Footprint = L x H x W (in)	Linear Force Capability (lbf.)	Valve Torque Capability (in oz.)	Syringe Volume Range (µL)	Weight (lbs.)
24,000*	1/1200	4.4 x 5 x 1.75	22	25	12.5 to 12,500	2.6

\*Custom variation of this model is possible with a resolution of 54,857 steps per stroke.

# PSD/3 Half-Height Syringe Pump

## The smallest, lightest smooth flow pump

At just 4.75" x 4.5" and 2.1 lbs., the PSD/3 is the smallest and lightest Hamilton syringe pump. The PSD/3 also offers the slowest and smoothest flow rates thanks to its pulseless Servo motor. This pump is capable of dispensing a single stroke over 60 minutes as a standard feature, although longer single stroke dispensing times are possible through customization. This feature is especially useful in applications where careful, minute liquid delivery is vital.

The PSD/3 performs all standard liquid handling functions, including dispensing, serial dispensing and diluting. It is the only half-height pump with an easy, push button valve exchange. Also, the PSD/3 is the only syringe pump that is mostly enclosed and can be flush mounted.


### Best for microfluidics

Microfluidics requires pumps to maintain the precise control and manipulation of fluids that are often geometrically constrained to a small scale flow path. While the PSD/4 performs proficiently in this capacity, the PSD/3 is the best choice.

### Advanced firmware

The PSD/3 comes with two exclusive Hamilton advancements—smooth flow and true speed firmware. Smooth flow firmware ensures a steady stream of liquid with no surges and little to no pulsing. This firmware creates a very consistent flow rate particularly beneficial to those using microfluidic chips to perform a variety of reactions.

The pump's true speed firmware guarantees it functions at the speed you set it to with no variation. This benefit is especially critical for applications where a precise flow rate is critical.

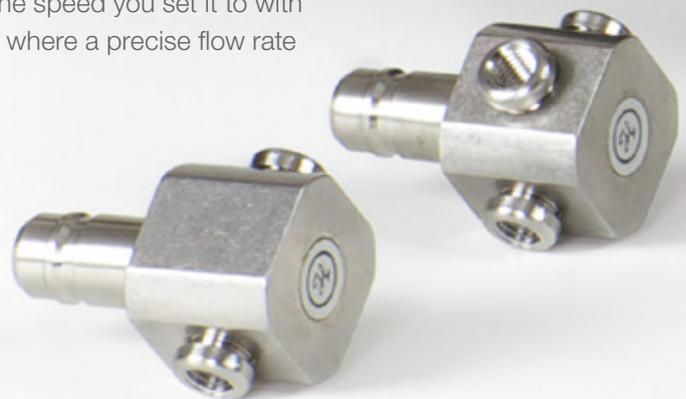

### PSD/3 Specifications

Highest Resolution (steps/stroke)	Fastest/Slowest Speed per Stroke (s)	Footprint = L x H x W (in)	Linear Force Capability (lbf.)	Valve Torque Capability (in oz.)	Syringe Volume Range (µL)	Weight (lbs.)
30,000	0.5/3600	4.75 x 4.5 x 2	7*	25	12.5 to 12,500	2.1

\*Custom variation of this model is available with a linear force capability of 12 lbf.



**Other features and benefits of the PSD/3:**

- ▶ 30 mm stroke length
- ▶ Highest resolution pump
- ▶ Flush mounting; Top and bottom mounting holes
- ▶ Best half-height pump for microfluidics
- ▶ Easy serviceability and replacement; low-cost parts
- ▶ Requires the least space
- ▶ Easily integrates with the Hamilton Modular Valve Positioner
- ▶ Pulseless Servo motor with 30,000 steps per 30 mm stroke
- ▶ Operates alone or in a daisy chain with up to 16 units
- ▶ Demo cables assist integration testing
- ▶ 10 years of market exposure
- ▶ RoHS-compliant



A full list of compatible syringes, valves and communication protocols is available in the Technical References section starting on page 31.

# PSD/2 Full-Height Syringe Pump

## Reliable, trustworthy performance for the large volumes

The PSD/2 is the most mature syringe pump within the PSD family with more than 20 years of well-documented success. It accommodates the largest syringe volumes and offers some of the least expensive sub-components. The PSD/2 performs all standard liquid handling functions, including dispensing, serial dispensing and diluting. Between the two full-height units, it is the only one to allow a simple, no-tools-required valve exchange. The pump is easy to service and replace, which minimizes field maintenance and system downtime. The PSD/2 valve drive offers the most torque, and this increased power allows for the greatest number of valve options, including multi-planar, multi-port valves. It is the best option for industrial applications and can be managed by a Programmable Logic Controller (PLC).

The PSD/2 comes with an easy-to-understand communication protocol that is quick to integrate into most operations. Customers looking for simple, intuitive command programming are well matched to this pump.



**Other features and benefits of the PSD/2:**

- ▶ 60 mm stroke length
- ▶ Most full-height mount options—top, side and bottom
- ▶ Easy serviceability and replacement; low-cost parts
- ▶ Most valve torque
- ▶ Easily integrates with the Hamilton Modular Valve Positioner
- ▶ 2,000 step syringe drive per 60 mm stroke
- ▶ Operates alone or in a daisy chain
- ▶ Demo cables assist integration testing
- ▶ Proven reliability and product longevity with over 20 years market exposure

**PSD/2 Specifications**

Highest Resolution (steps/stroke)	Fastest/Slowest Speed per Stroke (s)	Footprint = L x H x W (in)	Linear Force Capability (lbf.)	Valve Torque Capability (in oz.)	Syringe Volume Range (μL)	Weight (lbs.)
2,000	2/60	4.2 x 9 x 2.5	30	71	25 to 50,000	3

Information on the full line of Hamilton syringes is available in the Instrument Syringes section on page 27.



# PSD/8 Full-Height Syringe Pump

## The strongest, fastest pump for heavy duty applications

If you have a demanding system or process that requires powerful liquid handling, then this is the pump for you. The PSD/8 is the strongest and fastest pump available from Hamilton Company. The PSD/8 has nearly 10 years of reliable, precise experience in the most strenuous situations.

The PSD/8 performs all standard liquid handling functions, including dispensing, serial dispensing and diluting. It is the only full-height pump where the valve bolts directly to the face. This rigid attachment ensures long-term alignment of the valve and syringe and increases accuracy. The pump is easy to service and replace, which minimizes field maintenance and system downtime. The PSD/8 has the most lift force (45 lbf.) and fastest flow rate.

The PSD/8 integrates well into most operations using simple, intuitive command programming.

### PSD/8 Specifications

Highest Resolution (steps/stroke)	Fastest/Slowest Speed per Stroke (s)	Footprint = L x H x W (in)	Linear Force Capability (lbf.)	Valve Torque Capability (in oz.)	Syringe Volume Range (μL)	Weight (lbs.)
24,000	1.3/600	4.76 x 10 x 2.56	45	65	50 to 25,000	5.4

A full list of compatible syringes, valves and communication protocols is available in the Technical References section starting on page 31.





# Modular Valve Positioners

Hamilton Modular Valve Positioners are self-contained, bidirectional valve positioners used for fluid selection and redirection. There are two models to choose from, digital or RS-232 serial, depending on your communication preference for the unit. Both models offer valves with 13 standard fluid paths. A built-in indicator and encoder-regulated DC stepper motor ensure both versions deliver accurate valve port alignment and location for optimum fluid delivery precision.

## Choosing the right model

The digital Modular Valve Positioner is controlled by equipment that has transistor-transistor logic, also known as TTL, or switch closure outputs.

The serial Modular Valve Positioner is designed for applications that can utilize RS-232 serial communication. The serial protocol provides better error handling and diagnostics that are especially helpful in critical applications. With serial command, up to 16 serial Modular Valve Positioners can be connected via a daisy chain. This model can be programmed using simple ASCII commands.

Both the digital and serial Modular Valve Positioners offer an optional cover. Units with a cover are typically used when the positioner is sitting on a bench top or needs to be better protected from fumes or harsh chemicals while the non-covered version is meant for internal integration into higher-level equipment.

## Valve options and other product features

Hamilton Modular Valve Positioners are exceptionally easy to service and modify. It is very simple to remove and replace their snap-in valves with other configurations to achieve different fluid delivery with the same positioner unit, maximizing flexibility and value. You can choose from valves with two to eight ports that offer a total of 15 different flow paths. Valves are available with chemically inert PTFE and CTFE, or ceramic flow paths and can be customized per your requirements.

The Modular Valve Positioner works with all PSD syringe pumps but is especially compatible with the PSD/2 and PSD/3. The PSD/2 and PSD/3 can be used in a daisy chain with the Modular Valve Positioner because they can be controlled by the same RS-232 communication protocol.

A full list of compatible syringes, valves and communication protocols is available in the Technical References section starting on page 31.



Visit [www.hamiltoncompany.com/OEM](http://www.hamiltoncompany.com/OEM) for more information on Hamilton liquid handling solution products.





### Modular Valve Positioner Specifications

Rotational Speed (RPM)	Speed per 90 Degrees	Footprint = L x H x W (in)	Communication Interface	Valve Torque Capability (in oz.)	Mounting Options	Maximum Daisy-Chained Capability	Weight (lbs.)
20	750 ms	4.2 x 4.4 x 2.4	RS-232 or Digital I/O-TLL	70	Front/face*	16 units	1.15

\*Only applies to the uncovered model

# Microlab<sup>®</sup> 600 Custom Program Syringe Pump

## The easiest option that's ready to go right out of the box

Take full command of your diluting and dispensing applications with the Microlab<sup>®</sup> 600 standalone syringe pump. Available in single and dual syringe configurations, the pump allows you to custom program methods and deploy commands to any instrument on your network from anywhere in the world, giving you unparalleled control of your process.

## Precision you control

The Microlab 600 is a highly precise syringe pump. This positive displacement system provides better than 99% accuracy, independent of a liquid's viscosity, vapor pressure, and temperature. The inert fluid path minimizes sample carryover and is compatible with harsh chemicals.

The standalone pump offers two communication capabilities—Ethernet and RS-232. To simplify the programming via Ethernet, Hamilton provides an Application Programming Interface (API) that controls the pump through simple commands that use Microsoft<sup>®</sup> .NET 2.0 framework. For RS-232, signals can be sent from Programmable Logic Controllers (PLC) and from computers using simple ASCII commands which can be sent from any computer so there is no dependence on .NET framework.

## Ready to go with minimal effort

The Microlab 600 custom program syringe pump is perfect for in-between or smaller scale OEM applications when a limited number of pumps are needed. As a fully formed solution, it doesn't require you to create a housing, develop a power source or design a communication board—it's ready to go right out of the box.

## Microlab 600 Specifications

<b>Accuracy</b>	+/- 1%	<b>Communication Protocol</b>	.NET 2.0 Application Programming Interface (API)
<b>Precision</b>	+/- 0.2%	<b>Pump Memory</b>	One method stored in non volatile memory
<b>Flow Rate</b>	0.003–6000 $\mu$ L/second (depending on syringe selected)	<b>Calibration</b>	Factory tested and traceable to N.I.S.T. standards
<b>Syringe Resolution</b>	0.002% of the nominal syringe volume	<b>Certifications</b>	CE, CSA
<b>Compatible Syringes</b>	10, 25, 50, 100, 250, 500 $\mu$ L, 1, 2.5, 5, 10, 25, and 50 mL	<b>Power Rating</b>	24 VDC, 2.5 A
<b>Fluid Path</b>	Borosilicate, PTFE, CTFE	<b>Dimensions</b>	7 x 5.5 x 10.5 inch (177.8 x 139.7 x 266.7 mm)
<b>Communication Type</b>	Ethernet 10/100 BASE-T, RS-232	<b>Weight</b>	13 lbs. (5.9 kg)





For more information on the Microlab 600, visit [www.hamiltoncompany.com/microlab600](http://www.hamiltoncompany.com/microlab600).



**This custom coding solution is the perfect solution for a variety of conditions including:**

- ▶ Sequential applications when automated liquid diluting or dispensing is part of a series of actions or traveling along a conveyor belt
- ▶ Control room environments where applications are managed remotely
- ▶ Dispensing volatile or complicated liquids such as mercury, epoxy or radioactive materials as part of a manufacturing or testing process
- ▶ Settings that require a fully developed precision diluting or dispensing solution work in tandem with a larger system
- ▶ Liquid handling applications that require the integration of multiple electronic devices to accomplish a single task
- ▶ Any situation that could benefit from remote automation or custom programming

# Instrument Valves

Hamilton instrument valves have all been thoughtfully designed and expertly manufactured to maximize value and performance. They can be used with automated valve actuators found on instruments such as the PSD pumps and the Modular Valve Positioner or in custom pumps of your own design. Hamilton offers two standard types of valves that are available off-the-shelf: PTFE plug valves and ceramic face seal valves.

## All Hamilton valves share the following features:

- ▶ Pressure compatibility up to 100 psi, though ceramic valves can be modified for higher pressures
- ▶ Housing—All valves are offered in aluminum. Stainless steel is available as a standard option on some valves, and any valve housing can be customized with PEEK, CTFE or other machineable materials.
- ▶ Chemically inert fluid paths
- ▶ Flat bottom ¼"-28 threaded ports
- ▶ Variety of fluid paths available that all minimize dead volume


## Features unique to PTFE plug valves:

- ▶ Lower cost
- ▶ Less dead volume
- ▶ Easier to flush

## Features unique to ceramic face seal valves:

- ▶ Longer life, especially with crystalline solutions
- ▶ More complex custom fluid paths are possible
- ▶ Lower breakaway and rotational torque

## Valve Construction Cutaway Illustration

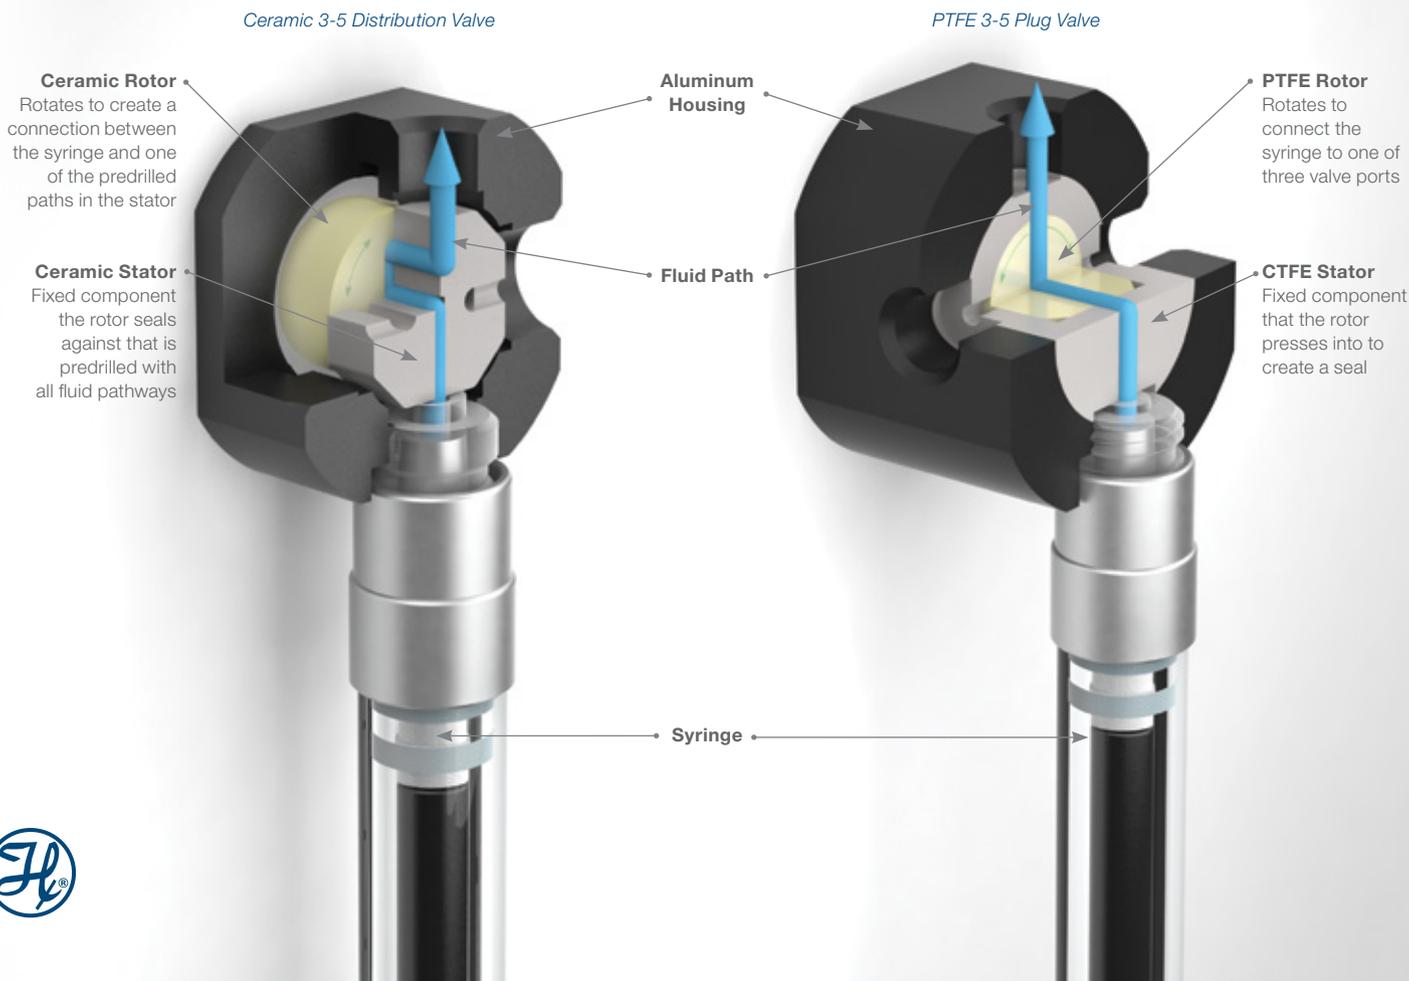

# Manual Valves

Hamilton manual plug valves are an economical and flexible way of custom building a fluid flow control system. They range from simple on/off valves to more complex multi-port arrangements using a combination of loop and distribution fluid logic. Hamilton manual valves feature chemically inert flow paths ideally suited for low pressure applications. All manual plug valves allow you to select and interchange a wide variety of fittings, adapters and tubing (including male and female Luers), FEP tubing assemblies and adapters that thread directly into the valve providing an endless variety of valve configurations for any flow application. There are three types of Hamilton manual valves—HV, HVP and HVX.

Diagrams illustrating the fluid logic and flow paths for all valves are available on page 34.

## HV Standard PTFE Valves

The HV valve is physically the smallest valve and constitutes a basic unit for the control of fluids. It is ideal for low pressure applications; from a basic on/off flow to a four-way distribution system.

## HVP Panel Mount PTFE Valves

The HVP valve is essentially the same as the HV valve except the HVP can be mounted into panels allowing for custom installation into control boards or instruments.

## HVX Large Body Panel Mount PTFE Valves

HVX valves are physically the largest valves. A larger port internal diameter allows increased fluid flow even with moderately viscous fluids. HVX valves can be used free standing or panel-mounted using an optional locking nut. It is the only body style to accommodate 6- and 8-port distribution and loop valves.



# Instrument Syringes

Hamilton Company was founded on the invention of the Microliter™ syringe. The company has been designing and crafting the industry's best syringes since 1953. Hamilton syringes have been trusted for nearly 60 years and for good reason—they are The Measure of Excellence®. Hamilton syringes are guaranteed to be exceptional precision instruments that perform reliably in your application and to your expectations.

## Instrument Syringe Overview

All Hamilton instrument syringes are either 1700 or 1000 series Gastight® syringes with a polymer plunger tip that creates a leak-free seal. Traditionally the tip is made from PTFE, but other materials are used for selected applications. The polymer tip essentially wipes the interior of the syringe barrel free of sample. This feature is useful for aqueous and low volatile organic samples because it reduces the chance a deposit will occur and result in cross-contamination or a damaged plunger.



### Syringe terminations

#### AD, AccuDil

These syringes have an axial fine thread M8 x 0.75. These syringes attach to instrumentation such as the Microlab 1000 series diluters and dispensers.



#### BFP, Bubble Free Prime

This syringe has 5/16 threads and is used on syringe pumps like the Microlab 600 diluters and dispensers conical plunger tip to flush all liquid from this termination. The resulting syringe is quicker to prime and flush during washes or solvent changes.



#### C, ChemSeal

The ChemSeal termination features a 1/4"-28 UNF male fitting. This syringe is used in low volume applications where system dead volume needs to be minimized. These syringes can be screwed directly into Hamilton HV, HVP, and HVX valves.



#### PTFE Luer Lock

This termination has a PTFE, male Luer taper with nickel plated brass locking hub for use with Kel-F needles, metal hub needles, and universal connectors. Also, the TLL is used with many Hamilton syringe pumps, OEM applications, and manual operations. Autoclavable when disassembled, except on 25 mL and greater syringes. Repeated autoclaving will shorten syringe life.



## Plunger types

Hamilton instrument syringes are available with either PTFE-tipped plungers or a long-life Ultra High Molecular Weight Poly Ethylene (UHMWPE) material particularly good for aqueous saline solutions. The plunger shafts themselves coated or uncoated and constructed of either stainless steel or aluminum, although custom materials can be used.

### Manual Plungers

Manual plungers come in two designs, one features a standard dome button and the other features a threaded plunger button. Syringes smaller than 1 mL have a stainless steel plunger for syringes, as shown in the picture on the bottom. Manual plungers 1 mL and larger are coated with PTFE and come with a 6-32 threaded hole that allows them to be mounted into automated syringe pumps, which is demonstrated by the image on the top.



### X-Style Plunger

This plunger is used for syringes 500  $\mu$ L and smaller intended for use in an automated syringe pump. A special plunger button protects the delicate plunger wire by stopping the pump at the zero line before damaging the tip. The stop also provides a 6-32 threaded hole that is used to mount the plunger into the syringe drive.



### XL-Style Plunger

This plunger is used on the XL-3000 modular digital syringe pumps and has a stop to limit damage to the plunger tip. This plunger is for full-height syringe pumps with a 60 mm stroke length.



### Bubble Free Prime Plunger (BFP)

This plunger is used on the syringes for Microlab 600 diluters and dispensers. The plunger features a conical plunger tip that extends through the threaded termination of the syringe into the Microlab 600 valve. This design helps remove air from the system and reduces the priming cycles required.



### XP-Style Plunger

This plunger is used on XP-3000 modular syringe pumps and has a stop to limit damage to the plunger tip. This plunger is for half-height syringes with a 30 mm stroke length.



### XB-Style Plunger

This plunger features a stop and a back bushing. The back bushing increases the plunger tip life, maintains proper plunger alignment and reduces the particles generated by plunger and glass contact.



# Syringe Longevity and Development

Accurate. Robust. Trustworthy. These are just a few of the words customers use to describe Hamilton syringes. Building exceptional syringes is an evolving science, which is why Hamilton is dedicated to the continuous research and development of this product line.

In addition to refinements made specifically to instrumentation syringes, Hamilton constantly enriches its entire syringe offering by either improving existing models or introducing new ones. Using customers' needs and feedback as a guide, we innovate in ways that maximize flexibility, performance and value. Some of our recent syringe enhancements across our entire product line include:

- ▶ Increase PM cycle intervals when handling saline liquids, acids, oxidants and strong bases
- ▶ Deactivated coating to minimize sample carryover
- ▶ Spring-loaded plunger tips that withstand higher temperatures and offer better longevity

For more detailed information on instrument syringes and their intended use, please refer to page 31.




**Any syringe, any way you want it**

*Hamilton specializes in custom syringes that satisfy the size, shape, termination, tip, fluid path or other requirement of your application. Whatever your need, Hamilton can meet it.*



# Technical References

## Syringe Specifications, Intended Use and Connections

Intended Use	Image
PSD/4 and PSD/3 syringe pumps	Standard 
	Long-life 
	Standard 
PSD/2 syringe pump	Long-life 
	SaltLine™ 
	Standard 
PSD/8 syringe pump	Long-life 
Microlab 600 syringe pump	Bubble Free Prime 
Spark Holland autosamplers, Cavo® XLP 6000 or 3000 syringe pumps, Kloehn™ V6 syringe pump	
Cavo® XP-3000 syringe pump	
Cavo® XL-3000 syringe pump	



Termination	Plunger Connection Style (Plunger Button)	Plunger Tip Material	Stroke Length (mm)	Plunger Shaft Material	Volume Range	Wetted Path Material
TLL	X	PTFE	30	Coated AL or SST	12.5 $\mu$ L to 12.5 mL	PTFE, CTFE, Borosilicate Glass
TLL	X	UHMW-PE	30	Stainless Steel	25 $\mu$ L to 5 mL	PTFE, CTFE, UHMW-PE, Borosilicate Glass
TLL	X	PTFE	60	Coated Aluminum or Stainless Steel	25 $\mu$ L to 50 mL	PTFE, CTFE, Borosilicate Glass
TLL	X	UHMW-PE	60	Stainless Steel	50 $\mu$ L to 10 mL	PTFE, CTFE, UHMW-PE, Borosilicate Glass
TLL	X	UHMW-PE	60	Hastelloy C or Polyamid	250 $\mu$ L to 10 mL	PTFE, CTFE, UHMW-PE, Borosilicate Glass
TLL	XL	PTFE	60	Coated Aluminum or Stainless Steel	50 $\mu$ L to 25 mL	PTFE, CTFE, Borosilicate Glass
TLL	XL	UHMW-PE	60	Stainless Steel	50 $\mu$ L to 10 mL	PTFE, CTFE, UHMW-PE, Borosilicate Glass
BFP	X	PTFE	60	Coated Aluminum or Stainless Steel	10 $\mu$ L to 50 mL	PTFE, CTFE, Borosilicate Glass
C	XL	PTFE	60	Coated Aluminum or Stainless Steel	25 $\mu$ L to 2.5 mL	PTFE, CTFE, Borosilicate Glass
C	XP	PTFE	30	Stainless Steel	50 $\mu$ L to 5 mL	PTFE, CTFE, Borosilicate Glass
TLL	XL	PTFE	60	Stainless Steel	50 $\mu$ L to 10 mL	PTFE, CTFE, Borosilicate Glass

# Valve Types by Use

## Manual Valves



Valve Model	Valve Description
HV	PTFE, Small Body, Manual Valve
HVP	PTFE, Panel Mount, Small Body, Manual Valve
HVX	PTFE, Standard or Panel Mount, Large Body, Manual Valve

## Modular Valve Positioner (MVP) Valves




Valve Model	Valve Description
HVM	PTFE, Small Body, MVP Valve
HVXM	PTFE, Large Body, MVP Valve
HVC	Ceramic, Small Body, MVP Valve
HVCX	Ceramic, Large Body, MVP Valve

## Precision Syringe Drive (PSD) Valves




Valve Model	Valve Description
HV	PTFE, Small Body, PSD Valve
HVC	Ceramic, Small Body, PSD Valve
HVCX	Ceramic, Large Body, PSD Valve


# PSD Syringe Pump Fluid Paths

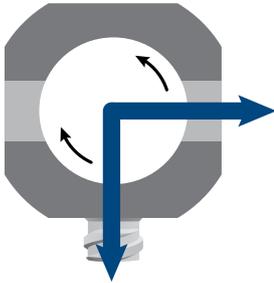


**Fluid Logic:** 3-2  
**Valve Description:**  
 90° Flow Path  
 Two ports, plus syringe port  
**PSD/2 and PSD/3:**  
 HV, HVC, HVC SST  
**PSD/4 and PSD/8:**  
 HVC

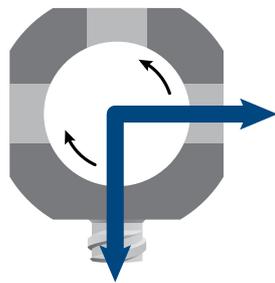


**Fluid Logic:** 4-2  
**Valve Description:**  
 90° Flow Path  
 Three ports, plus syringe port  
**PSD/2 and PSD/3:**  
 HVC  
**PSD/4 and PSD/8:**  
 HVC

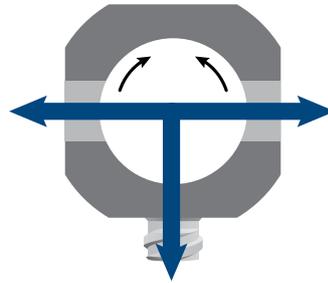


**Fluid Logic:** 3-3  
**Valve Description:**  
 "T" Flow Path  
 Two ports, plus syringe port  
**PSD/4 and PSD/8:**  
 HVC, HV

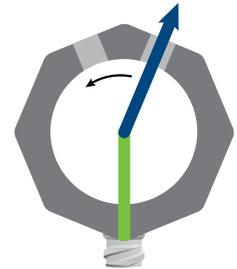


**Fluid Logic:** Y-Valve  
**Valve Description:**  
 "Y" Flow Path  
 Two ports, plus syringe port  
**PSD/4 and PSD/8:**  
 HV, HVC

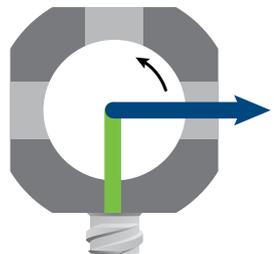


**Fluid Logic:** 3-5  
**Valve Description:**  
 Distribution Flow Path  
 Three ports, plus syringe port  
**PSD/2 and PSD/3:**  
 HVC, HVC SST  
**PSD/4 and PSD/8:**  
 HVC

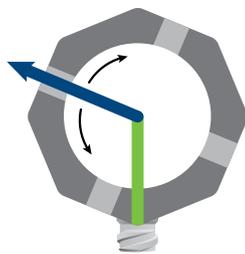

**Fluid Logic:** 4-5  
**Valve Description:**  
 Distribution Flow Path  
 Four ports plus syringe port  
**PSD/2 and PSD/3:**  
 HVCX, HVCX SST  
**PSD/4 and PSD/8:**  
 HVCX

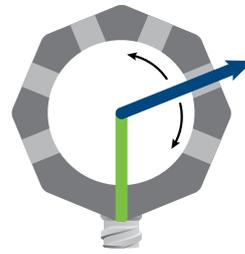

**Fluid Logic:** 6-5  
**Valve Description:**  
 Distribution Flow Path  
 Six ports plus syringe port  
**PSD/2 and PSD/3:**  
 HVCX  
**PSD/4 and PSD/8:**  
 HVCX

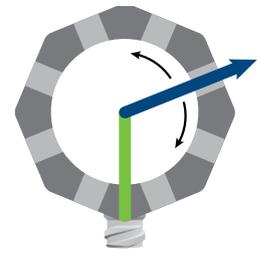


**Fluid Logic:** 8-5  
**Valve Description:**  
 Distribution Flow Path  
 Eight ports plus syringe port  
**PSD/2 and PSD/3:**  
 HVCX, HVCX SST  
**PSD/4 and PSD/8:**  
 HVCX

## Legend

- Green line denotes a fixed path fluid always flows through
- Blue arrow is a path that rotates and can flow to any port, as indicated by the black directional arrows
- The syringe termination icon represents the fixed syringe connection port

# Modular Valve Positioner and Manual Valve Fluid Paths

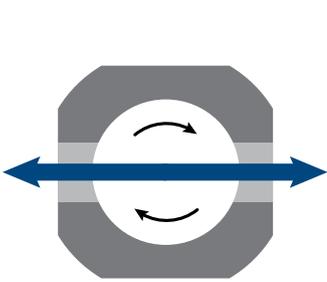

**Fluid Logic:** 1-1

**Valve Description:**

180° Flow Path  
Two ports


**Modular Valve Positioner**

**Valve Types:**

HVXM

**Manual Valve Types:**

HV, HVP, HVX

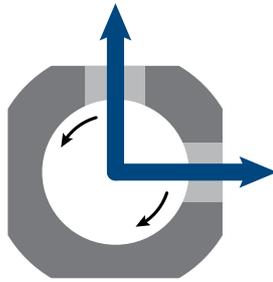

**Fluid Logic:** 2-2

**Valve Description:**

90° Flow Path  
Two ports


**Modular Valve Positioner**

**Valve Types:**

HVXM

**Manual Valve Types:**

HV, HVP, HVX

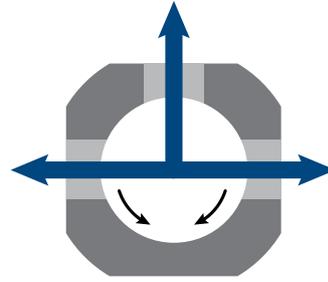

**Fluid Logic:** 3-3

**Valve Description:**

“T” Flow Path  
Three ports


**Modular Valve Positioner**

**Valve Types:**

HVXM

**Manual Valve Types:**

HV, HVP, HVX

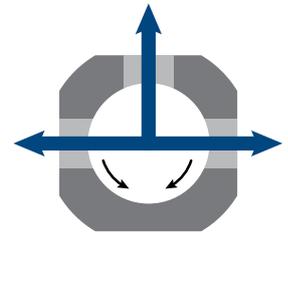

**Fluid Logic:** 3-2

**Valve Description:**

90° Flow Path  
Three ports


**Modular Valve Positioner**

**Valve Types:**

HVM, HVXM, HVC

**Manual Valve Types:**

HV, HVP, HVX

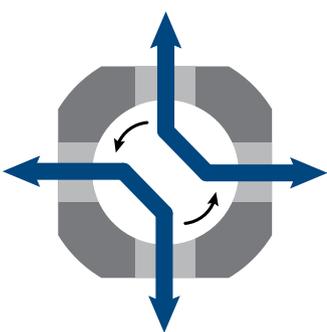

**Fluid Logic:** 4-4

**Valve Description:**

Loop Flow Path  
Four ports


**Modular Valve Positioner**

**Valve Types:**

HVM

**Manual Valve Types:**

HV, HVP, HVX

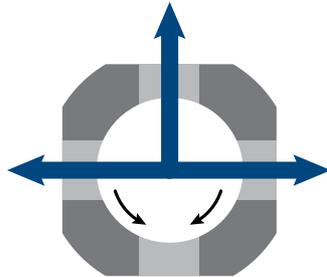

**Fluid Logic:** 4-3

**Valve Description:**

“T” Flow Path  
Four ports


**Modular Valve Positioner**

**Valve Types:**

HVXM

**Manual Valve Types:**

HV, HVP, HVX

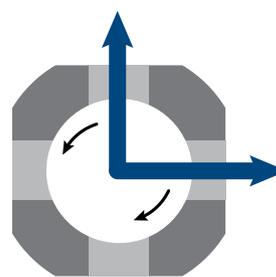

**Fluid Logic:** 4-2

**Valve Description:**

90° Flow Path  
Four ports


**Modular Valve Positioner**

**Valve Types:**

HVM, HVXM, HVC

**Manual Valve Types:**

HV, HVP, HVX

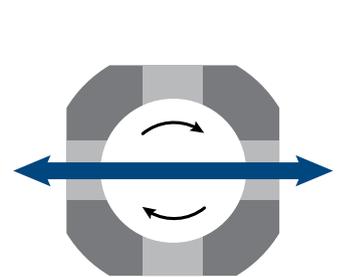

**Fluid Logic:** 4-1

**Valve Description:**

180° Flow Path  
Four ports

**Modular Valve Positioner**

**Valve Types:**

HVM


**Manual Valve Types:**

HV, HVX

**Legend**

-  Green circle denotes a there is a fixed fluid path in the face of the valve fluid always flows through
-  Blue arrow is a path that rotates and can flow to any port, as indicated by the black directional arrows




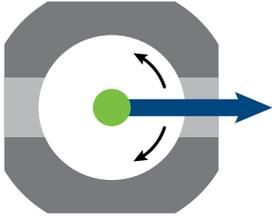

**Fluid Logic:** 1-5

**Valve Description:**  
Distribution Flow Path  
Two ports

**Manual Valve Types:**  
HV, HVP, HVX

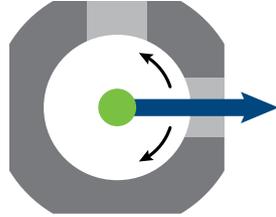


**Fluid Logic:** 2-5

**Valve Description:**  
Distribution Flow Path  
Two ports

**Modular Valve Positioner  
Valve Types:**  
HVXM

**Manual Valve Types:**  
HV, HVP, HVX

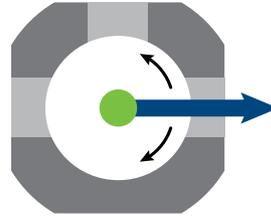


**Fluid Logic:** 3-5

**Valve Description:**  
Distribution Flow Path  
Three ports

**Modular Valve Positioner  
Valve Types:**  
HVXM, HVC

**Manual Valve Types:**  
HV, HVP, HVX

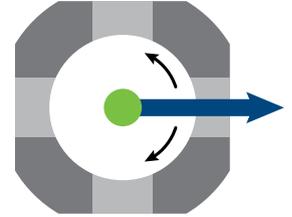


**Fluid Logic:** 4-5

**Valve Description:**  
Distribution Flow Path  
Four ports

**Modular Valve Positioner  
Valve Types:**  
HVM, HVXM, HVC

**Manual Valve Types:**  
HV, HVP, HVX

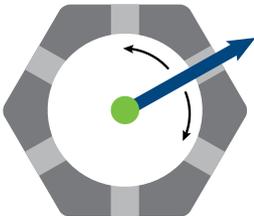


**Fluid Logic:** 6-5

**Valve Description:**  
Distribution Flow Path  
Six ports

**Modular Valve Positioner  
Valve Types:**  
HVXM

**Manual Valve Types:**  
HV, HVP, HVX

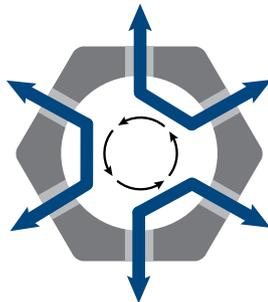


**Fluid Logic:** 6-6

**Valve Description:**  
Loop Flow Path  
Six ports

**Modular Valve Positioner  
Valve Types:**  
HVXM

**Manual Valve Types:**  
HV, HVP, HVX




**Fluid Logic:** 8-5

**Valve Description:**  
Distribution Flow Path  
Eight ports

**Modular Valve Positioner  
Valve Types:**  
HVXM, HVCX

**Manual Valve Types:**  
HVX

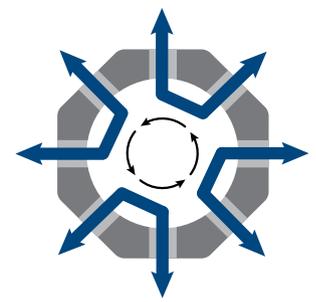

**Fluid Logic:** 8-7

**Valve Description:**  
Loop Flow Path  
Eight ports

**Modular Valve Positioner  
Valve Types:**  
HVXM

**Manual Valve Types:**  
HVX

# Communications Protocol

Communication Protocol	PSD/2	PSD/3	PSD/4	PSD/8	Microlab 600	Modular Valve Positioner
RS-232	X	X	X	X	X	X
RS-485			X	X		
Digital I/O-TLL						X
CAN			X			
Ethernet					X	



# About Hamilton Company


Hamilton Company is a global enterprise with headquarters in Reno, Nevada, Hopkinton, Massachusetts, and Bonaduz, Switzerland and subsidiary offices throughout the world.

We are an industry leader in the design and manufacture of liquid handling, process analytics, robotics and automated storage solutions. For more than 50 years, Hamilton has been satisfying customer needs by combining quality materials with skilled workmanship to ensure the highest level of performance. Hamilton's lifelong commitment to precision and quality has earned us global ISO 9001 Certification.




Founded on the technology of analytical Microliter™ and Gastight® syringes, Hamilton has a broad offering of laboratory products including manual and semi-automated precision fluid measuring instruments, chromatography products, process sensors, laboratory electrodes, pipettes and more. Top innovations from these lines include Arc™ pH, DO and conductivity intelligent sensors, the BioLevigator™ and Microlab® 600 diluters/dispensers.

A pioneer in liquid handling equipment and laboratory automation technology, Hamilton Robotics is known for advancing life science and biotechnology industries through reliability, performance and flexibility. Hamilton continues to be the market leader with patented technologies such as Compression-induced O-Ring Expansion (CO-RE), Total Aspiration and Dispensing Monitoring (TADM) and Anti Droplet Control (ADC). Hamilton's feature platform, Microlab STAR, is the highest selling automated pipetting platform for several years running, while Microlab NIMBUS® is the first in class of compact, high-speed personalized pipetting workstations.

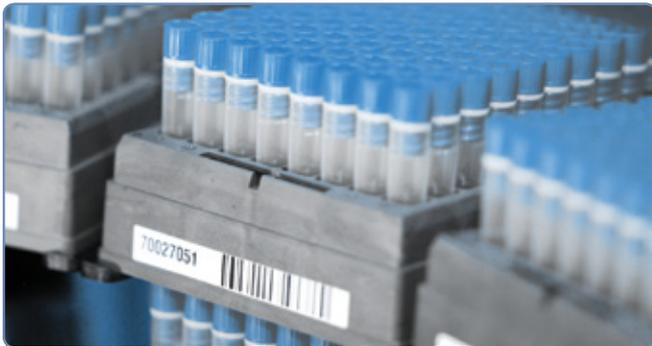

The Hamilton Storage Technologies division offers comprehensive ultra-low temperature automated sample management systems for a broad array of life science processes. Its line of biobanking, compound storage and consumable solutions consists of products such as BIOS™, SAM™ and ASM™, designed for sample integrity, flexibility, and reliability.

Hamilton Company is focused on blending invention and accuracy to deliver customers unparalleled products.

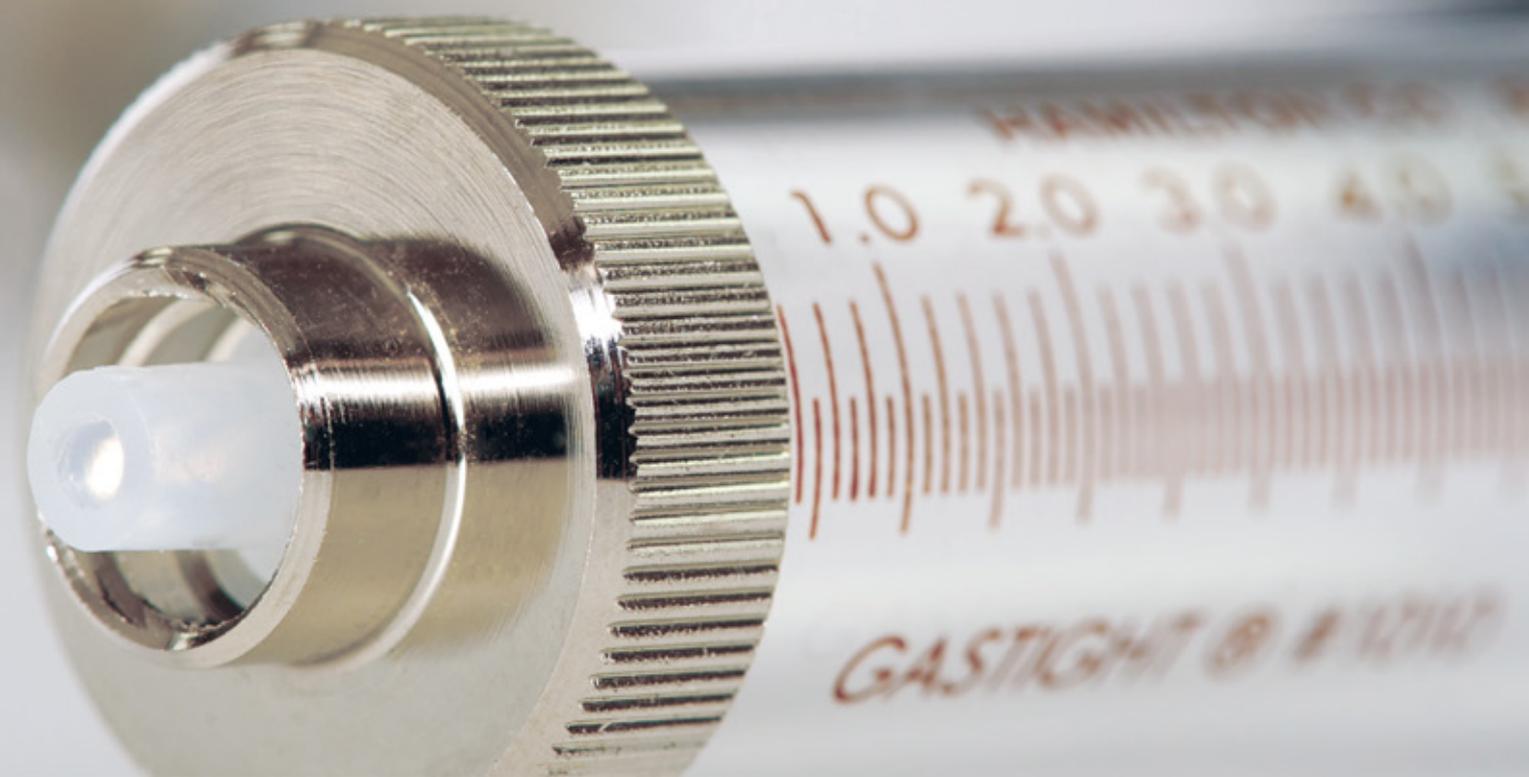

Your Hamilton Representative

©2013 Hamilton Company. All rights reserved.

Cavo is either a trademark or registered trademark in major countries of Tecan Group Ltd., Männedorf, Switzerland

Microsoft, .NET, Visual C# and Visual Basic are registered trademarks of Microsoft Corporation in the United States and other countries.

LabVIEW is a trademark of National Instruments. Neither Hamilton Company, nor any software programs or other goods or services offered by Hamilton Company, are affiliated with, endorsed by, or sponsored by National Instruments.

Kloehn is a trademark of Kloehn Inc. in the U.S. and/or other countries.

All other trademarks are owned and/or registered by Hamilton Company in the U.S. and/or other countries. Lit. No. L60031 Rev. B – 11/2013

**HAMILTON** 

Web: [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

USA: 800-648-5950

Europe: +41-81-660-60-60

**Hamilton Americas & Pacific Rim**

4970 Energy Way  
Reno, Nevada 89502 USA  
Tel: +1-775-858-3000  
Fax: +1-775-856-7259  
[sales@hamiltoncompany.com](mailto:sales@hamiltoncompany.com)

**Hamilton Europe, Asia, & Africa**

Via Crusch 8  
CH-7402 Bonaduz, GR, Switzerland  
Tel: +41-81-660-60-60  
Fax: +41-81-660-60-70  
[contact@hamilton.ch](mailto:contact@hamilton.ch)

To find a representative in your area, please visit [hamiltoncompany.com/contacts](http://hamiltoncompany.com/contacts).